

Product Data Sheet



RP-113178 Pick and Place Underfilm

Features

- Enhances CSP and BGA solder joint reliability
- Reduces cost by combining pick and place plus soldering in one heating pass (no dispensing).
- No capital expense or equipment required
- Compatible with existing lead and Pb-free materials and reflow profiles.
- Air or nitrogen reflow compatible
- Requires no pre-baking of boards
- Reworkable
- RoHS compatible
- AOI easy recognition

Application

- Pick and Place Underfilm technology was developed to reduce solder joint fatigue failures caused from drop and shock associated with brittle lead free solder joints and reduced joint size due to BGA miniaturization.
- Simplified application utilizing existing tape and reel feeders plus high volume pick and place equipment on a current SMT assembly line.
- Underfilm does not interact with solder or flux
- Over one billion units in service
- Patented in USA and other countries

Introduction

- Residue and solvent free, requires no post cleaning
- Migration free, will not interfere with solder or flux
- Micro precision technology allows for other SMT components to be placed in close proximity.

Reliability

- Underfilm offers excellent adhesion to BGA / CSP devices
- Edge weighted 6 foot drop test* results show a minimum of 10x improvement in solder joint reliability over BGA alone. 50x improvement has been obtained.

Manufacturing

- No equipment purchase required
- No extra floor space required
- No fumes because no dispensing
- No equipment to maintain or needles to clog
- No additional cure cycle
- No uncured cleaning required
- No pre-bake required
- 100% material utilization because no dispense


Alltemated Inc.
3353 N. Ridge Ave.
Arlington Heights, IL 60004
www.Alltemated.com

Packaging

- Supplied on reel per EIA 481 carrier tape.
- Utilization of precision carrier tape, cover tape and standard reels
- Standard moisture barrier bags and vacuum sealing

Process Recommendations

- Screen print solder paste, pick and place Underfilm, pick and place BGA, reflow
- No dehydration bake required / no clean
- Standard Pb-free reflow profiles can be used

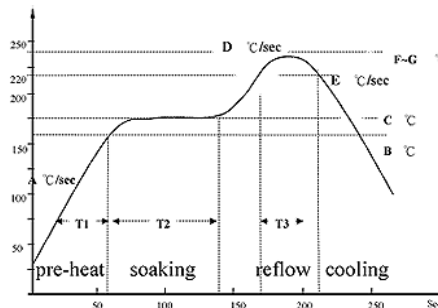

Rework

- Underfilm is 100% reworkable

Storage and Handling


- No special storage or handling required
- Outstanding shelf life

Mechanical

Hardness Shore A	94A
Tensile Modulus	1200 PSI
Vicat Softening Point	177 F
Specific Gravity	1.22 g/cc
CTE	85 uin/in-F

Safety

- Underfilm is a benign, non-toxic material under a typical reflow profile.

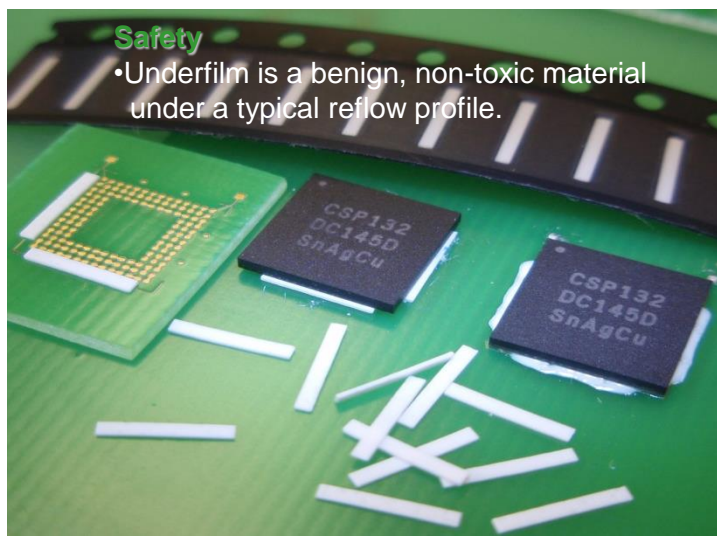

*similar to other published BGA drop test reliability studies